

Broadband Specifications

Data Rates

4.42Mbps - 24Mbps

Ports

Two Ethernet LAN 10BaseT ports (RJ-45)

Connectors

Ant. In: F-Connector
TV Out: F-Connector
Video: RCA Connector
S-Video: S-Video Connector
Audio R-L: RCA Connectors
Satellite In: F-Connector

Protocol Supported

IP based

Bit Error Rate

1×10^{-10} - threshold

MeteorByte™

Return path via StarLite™
For further details, please refer to StarLite brochure or contact us for information

MeteorSurf™

Return path via terrestrial WAN
E.g. Frame Relay, Leased Line, Dial ups.

MeteorCast™

No return path needed




TELESINDO

PT. Telesindo Mulia
8, Jl. Hayam Wuruk, 3/F
Jakarta 10120, Indonesia

Tel : (62-21) 386-1482
Fax: (62-21) 386-1426

Email: mktg@telesindo.com
Web: www.telesindo.com

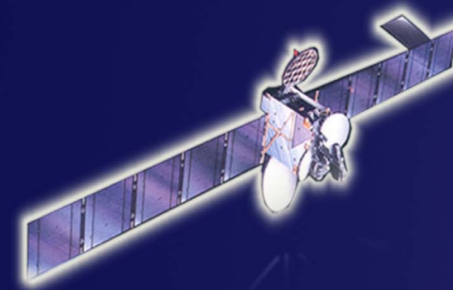

Distant
Learning

Corporate
Video

Broadcast

BROADBAND SERVICES

Data
Broadcast

Corporate
Intranet

MeteorByte

MeteorCast

MeteorSurf



